



北京市方寸电子有限公司

BEIJING FINE CHAIN ELECTRONIC CO. LTD.

整流桥堆 SINGLE-PHASE BRIDGE RECTIFIERS

| 型号 | 参数 | 最大反向电压 | | 正向电流 | | 反向电流 | | 最大正向电压 | | 外形图号 |
|-------------|------|--------|----------------|----------------|----------------|-----------------|-----------------|--------|--|------|
| | | VRRM | I _o | T _A | I _R | I _{FM} | V _{FM} | | | |
| | | V | A | °C | uA | A | V | | | |
| DB(DF)101 | 50 | 1.0 | 25 | 10 | 1.0 | 1.1 | 图 1 | | | |
| DB(DF)102 | 100 | 1.0 | 25 | 10 | 1.0 | 1.1 | | | | |
| DB(DF)103 | 200 | 1.0 | 25 | 10 | 1.0 | 1.1 | | | | |
| DB(DF)104 | 400 | 1.0 | 25 | 10 | 1.0 | 1.1 | | | | |
| DB(DF)105 | 600 | 1.0 | 25 | 10 | 1.0 | 1.1 | | | | |
| DB(DF)106 | 800 | 1.0 | 25 | 10 | 1.0 | 1.1 | | | | |
| DB(DF)107 | 1000 | 1.0 | 25 | 10 | 1.0 | 1.1 | | | | |
| W005(RB151) | 50 | 1.0 | 25 | 10 | 1.0 | 1.0 | 图 2 | | | |
| W01(RB152) | 100 | 1.0 | 25 | 10 | 1.0 | 1.0 | | | | |
| W02(RB153) | 200 | 1.0 | 25 | 10 | 1.0 | 1.0 | | | | |
| W04(RB154) | 400 | 1.0 | 25 | 10 | 1.0 | 1.0 | | | | |
| W06(RB155) | 600 | 1.0 | 25 | 10 | 1.0 | 1.0 | | | | |
| W08(RB156) | 800 | 1.0 | 25 | 10 | 1.0 | 1.0 | | | | |
| W10(RB157) | 1000 | 1.0 | 25 | 10 | 1.0 | 1.0 | | | | |
| 2W005 | 50 | 2.0 | 25 | 10 | 2.0 | 1.1 | 图 2 | | | |
| 2W01 | 100 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2W02 | 200 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2W04 | 400 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2W06 | 600 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2W08 | 800 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2W10 | 1000 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| KBPO05 | 50 | 1.5 | 25 | 10 | 1.0 | 1.0 | 图 3 | | | |
| KBPO1 | 100 | 1.5 | 25 | 10 | 1.0 | 1.0 | | | | |
| KBPO2 | 200 | 1.5 | 25 | 10 | 1.0 | 1.0 | | | | |
| KBPO4 | 400 | 1.5 | 25 | 10 | 1.0 | 1.0 | | | | |
| KBPO6 | 600 | 1.5 | 25 | 10 | 1.0 | 1.0 | | | | |
| KBPO8 | 800 | 1.5 | 25 | 10 | 1.0 | 1.0 | | | | |
| KBPO10 | 1000 | 1.5 | 25 | 10 | 1.0 | 1.0 | | | | |

公司地址：北京市西四南大街 86 号
电 话：010 66035767；66020482
传 真：010 66070752

网 址：<http://www.fc99.com>
E-MAIL：fc1@fc99.com
邮 编：100034



北京市方寸电子有限公司

BEIJING FINE CHAIN ELECTRONIC CO. LTD.

整流桥堆 SINGLE-PHASE BRIDGE RECTIFIERS

| 型号 | 参数 | 最大反向电压 | | 正向电流 | | 反向电流 | | 最大正向电压 | | 外形图号 |
|----------|------|--------|----------------|----------------|----------------|-----------------|-----------------|--------|--|------|
| | | VRRM | I _o | T _A | I _R | I _{FM} | V _{FM} | | | |
| | | V | A | °C | uA | A | V | | | |
| 2KBP005 | 50 | 2.0 | 25 | 10 | 2.0 | 1.1 | 图 3 | | | |
| 2KBP01 | 100 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2KBP02 | 200 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2KBP04 | 400 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2KBP06 | 600 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2KBP08 | 800 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| 2KBP10 | 1000 | 2.0 | 25 | 10 | 2.0 | 1.1 | | | | |
| KBPC1005 | 50 | 3.0 | 25 | 10 | 1.5 | 1.1 | 图 7 | | | |
| KBPC101 | 100 | 3.0 | 25 | 10 | 1.5 | 1.1 | | | | |
| KBPC102 | 200 | 3.0 | 25 | 10 | 1.5 | 1.1 | | | | |
| KBPC104 | 400 | 3.0 | 25 | 10 | 1.5 | 1.1 | | | | |
| KBPC106 | 600 | 3.0 | 25 | 10 | 1.5 | 1.1 | | | | |
| KBPC108 | 800 | 3.0 | 25 | 10 | 1.5 | 1.1 | | | | |
| KBPC110 | 1000 | 3.0 | 25 | 10 | 1.5 | 1.1 | | | | |
| KBL005 | 50 | 4.0 | 25 | 10 | 4.0 | 1.1 | 图 7 | | | |
| KBL01 | 100 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBL02 | 200 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBL04 | 400 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBL06 | 600 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBL08 | 800 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBL10 | 1000 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBU005 | 50 | 4.0 | 25 | 10 | 4.0 | 1.1 | 图 4 | | | |
| KBU01 | 100 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBU02 | 200 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBU04 | 400 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBU06 | 600 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBU08 | 800 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |
| KBU10 | 1000 | 4.0 | 25 | 10 | 4.0 | 1.1 | | | | |

公司地址：北京市西四南大街 86 号
电 话：010 66035767；66020482
传 真：010 66070752

网 址：<http://www.fc99.com>
E-MAIL：fc1@fc99.com
邮 编：100034



北京市方寸电子有限公司

BEIJING FINE CHAIN ELECTRONIC CO. LTD.

整流桥堆 SINGLE-PHASE BRIDGE RECTIFIERS

| 型号 | 参数 | 最大反向电压 | | 正向电流 | | 反向电流 | | 最大正向电压 | | 外形图号 |
|----------|------|--------|----------------|----------------|----------------|------|-----|--------|--|------|
| | | VRRM | I _o | T _a | I _R | IFM | VFM | | | |
| | | V | A | °C | A | A | V | | | |
| KBPC6005 | 50 | 6 | 25 | 10 | 3.0 | 1.2 | 图 7 | | | |
| KBPC601 | 100 | 6 | 25 | 10 | 3.0 | 1.2 | | | | |
| KBPC602 | 200 | 6 | 25 | 10 | 3.0 | 1.2 | | | | |
| KBPC604 | 400 | 6 | 25 | 10 | 3.0 | 1.2 | | | | |
| KBPC606 | 600 | 6 | 25 | 10 | 3.0 | 1.2 | | | | |
| KBPC608 | 800 | 6 | 25 | 10 | 3.0 | 1.2 | | | | |
| KBPC610 | 1000 | 6 | 25 | 10 | 3.0 | 1.2 | | | | |
| KBU6005 | 50 | 6 | 25 | 10 | 6.0 | 1.2 | 图 5 | | | |
| KBU601 | 100 | 6 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU602 | 200 | 6 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU604 | 400 | 6 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU606 | 600 | 6 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU608 | 800 | 6 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU610 | 1000 | 6 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBPC8005 | 50 | 8 | 25 | 10 | 4.0 | 1.2 | 图 8 | | | |
| KBPC801 | 100 | 8 | 25 | 10 | 4.0 | 1.2 | | | | |
| KBPC802 | 200 | 8 | 25 | 10 | 4.0 | 1.2 | | | | |
| KBPC804 | 400 | 8 | 25 | 10 | 4.0 | 1.2 | | | | |
| KBPC806 | 600 | 8 | 25 | 10 | 4.0 | 1.2 | | | | |
| KBPC808 | 800 | 8 | 25 | 10 | 4.0 | 1.2 | | | | |
| KBPC810 | 1000 | 8 | 25 | 10 | 4.0 | 1.2 | | | | |
| KBU8005 | 50 | 8 | 25 | 10 | 6.0 | 1.2 | 图 5 | | | |
| KBU801 | 100 | 8 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU802 | 200 | 8 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU804 | 400 | 8 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU806 | 600 | 8 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU808 | 800 | 8 | 25 | 10 | 6.0 | 1.2 | | | | |
| KBU810 | 1000 | 8 | 25 | 10 | 6.0 | 1.2 | | | | |

公司地址：北京市西四南大街 86 号
电 话：010 66035767；66020482
传 真：010 66070752

网 址：<http://www.fc99.com>
E-MAIL：fc1@fc99.com
邮 编：100034



北京市方寸电子有限公司

BEIJING FINE CHAIN ELECTRONIC CO. LTD.

整流桥堆 SINGLE-PHASE BRIDGE RECTIFIERS

| 型号 | 参数 | 最大反向电压 | | 正向电流 | | 反向电流 | | 最大正向电压 | | 外形图号 |
|------------|------|--------|----------------|----------------|----------------|-----------------|-----------------|--------|--|------|
| | | VRRM | I _o | T _A | I _R | I _{FM} | V _{FM} | | | |
| | | V | A | °C | uA | A | V | | | |
| KBPC10-005 | 50 | 10 | 25 | 10 | 5.0 | 1.2 | 图 8 | | | |
| KBPC10-01 | 100 | 10 | 25 | 10 | 5.0 | 1.2 | | | | |
| KBPC10-02 | 200 | 10 | 25 | 10 | 5.0 | 1.2 | | | | |
| KBPC10-04 | 400 | 10 | 25 | 10 | 5.0 | 1.2 | | | | |
| KBPC10-06 | 600 | 10 | 25 | 10 | 5.0 | 1.2 | | | | |
| KBPC10-08 | 800 | 10 | 25 | 10 | 5.0 | 1.2 | | | | |
| KBPC10-10 | 1000 | 10 | 25 | 10 | 5.0 | 1.2 | | | | |
| KBPC15-005 | 50 | 15 | 25 | 10 | 7.5 | 1.2 | 图 6 | | | |
| KBPC15-01 | 100 | 15 | 25 | 10 | 7.5 | 1.2 | | | | |
| KBPC15-02 | 200 | 15 | 25 | 10 | 7.5 | 1.2 | | | | |
| KBPC15-04 | 400 | 15 | 25 | 10 | 7.5 | 1.2 | | | | |
| KBPC15-06 | 600 | 15 | 25 | 10 | 7.5 | 1.2 | | | | |
| KBPC15-08 | 800 | 15 | 25 | 10 | 7.5 | 1.2 | | | | |
| KBPC15-10 | 1000 | 15 | 25 | 10 | 7.5 | 1.2 | | | | |
| KBPC25-005 | 50 | 25 | 25 | 10 | 12.5 | 1.2 | 图 6 | | | |
| KBPC25-01 | 100 | 25 | 25 | 10 | 12.5 | 1.2 | | | | |
| KBPC25-02 | 200 | 25 | 25 | 10 | 12.5 | 1.2 | | | | |
| KBPC25-04 | 400 | 25 | 25 | 10 | 12.5 | 1.2 | | | | |
| KBPC25-06 | 600 | 25 | 25 | 10 | 12.5 | 1.2 | | | | |
| KBPC25-08 | 800 | 25 | 25 | 10 | 12.5 | 1.2 | | | | |
| KBPC25-10 | 1000 | 25 | 25 | 10 | 12.5 | 1.2 | | | | |
| KBPC35-005 | 50 | 35 | 25 | 10 | 17.5 | 1.2 | 图 6 | | | |
| KBPC35-01 | 100 | 35 | 25 | 10 | 17.5 | 1.2 | | | | |
| KBPC35-02 | 200 | 35 | 25 | 10 | 17.5 | 1.2 | | | | |
| KBPC35-04 | 400 | 35 | 25 | 10 | 17.5 | 1.2 | | | | |
| KBPC35-06 | 600 | 35 | 25 | 10 | 17.5 | 1.2 | | | | |
| KBPC35-08 | 800 | 35 | 25 | 10 | 17.5 | 1.2 | | | | |
| KBPC35-10 | 1000 | 35 | 25 | 10 | 17.5 | 1.2 | | | | |

公司地址：北京市西四南大街 86 号
电 话：010 66035767；66020482
传 真：010 66070752

网 址：<http://www.fc99.com>
E-MAIL：fc1@fc99.com
邮 编：100034

外型图

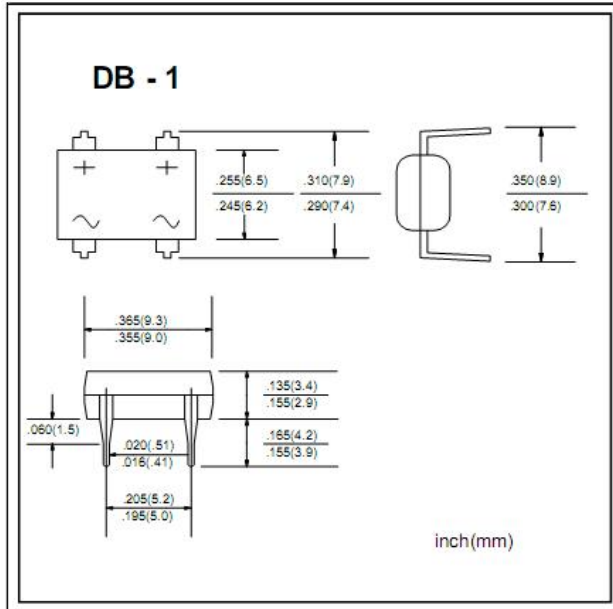


图 1

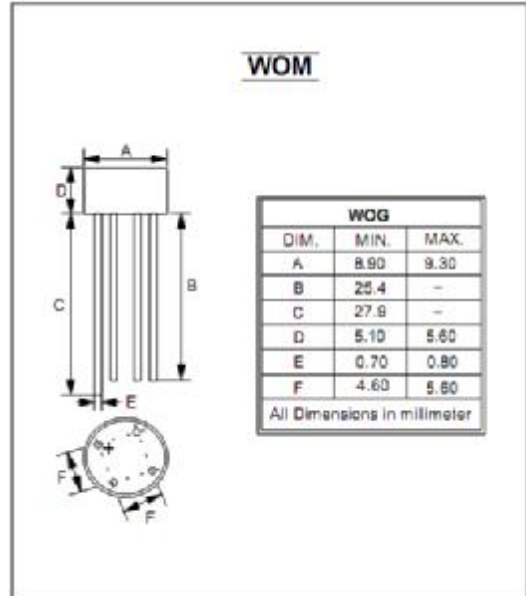


图 2

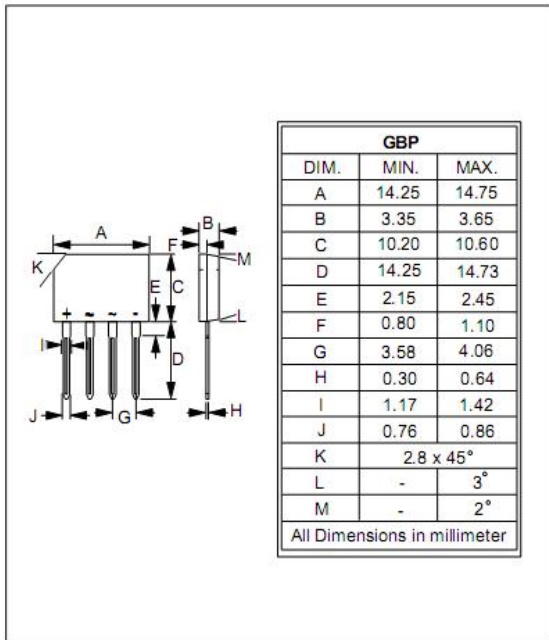


图 3

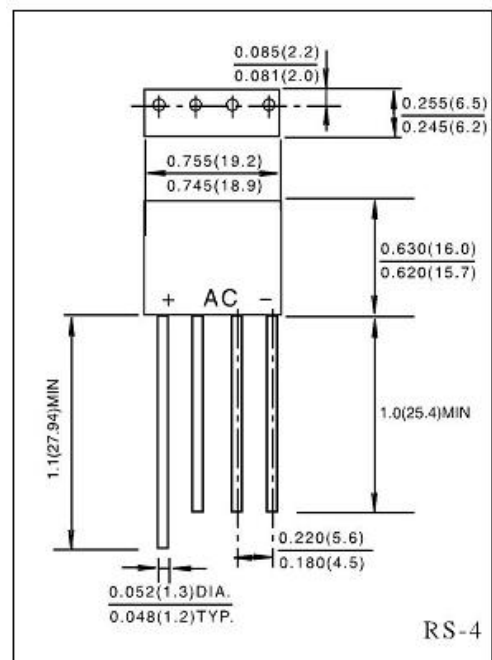


图 4

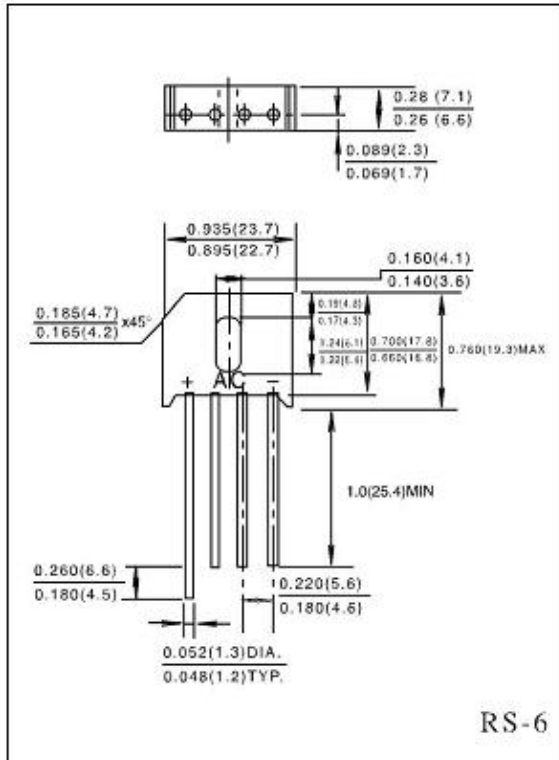


图 5

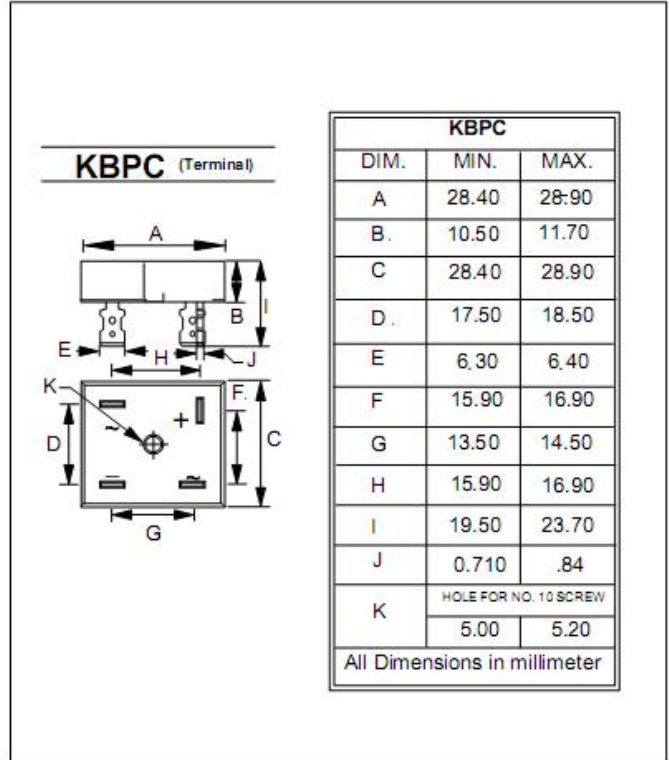


图 6

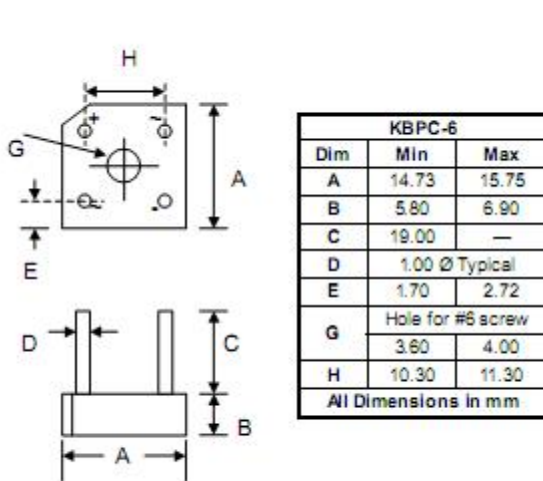


图 7

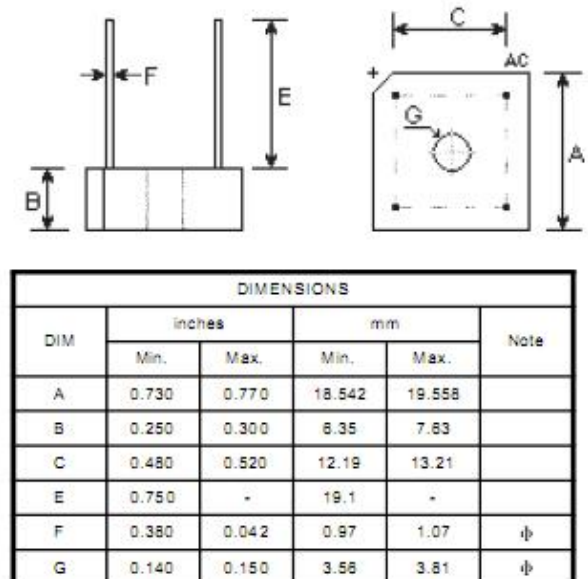


图 8